



**UniFi**<sup>®</sup> **PROTECT**

UniFi Video Camera G3 Flex  
Ceiling Mount Accessory  
Model: UVC-G3-F-C

QUICK START GUIDE

## Package Contents



Ceiling Mount  
Bracket



Ceiling Backing  
Plate



Mounting  
Cover



Installation Screw



Screws  
(Qty. 3)




Screw Anchors  
(Qty. 3)

## Installation Requirements

- UVC G3 Flex (sold separately)
- Refer to the [UVC-G3-FLEX Quick Start Guide](#) for camera installation instructions
- Phillips screwdriver
- Drill and bit (6 mm for drywall anchors or 3 mm for screws)
- Category 5 (or higher) cable for indoor installations


## Hardware Overview

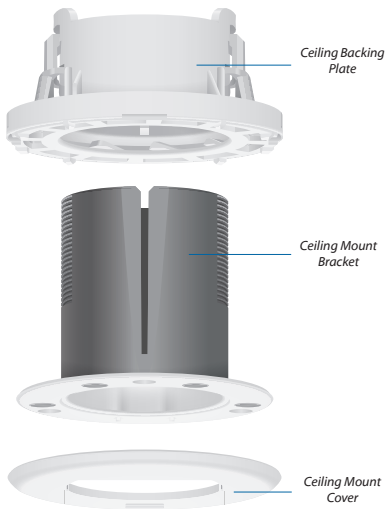

**Note:** Use of the *Ceiling Backing Plate* is optional depending on the installation type.

## Before You Begin

1. Disassemble the separate pieces of the ceiling accessory:
  - a. Push in the two side clips of the *Ceiling Backing Plate* to release the backing plate from the *Ceiling Mount Bracket*.
  - b. Pull the *Mounting Cover* off of the *Ceiling Mount Bracket*.

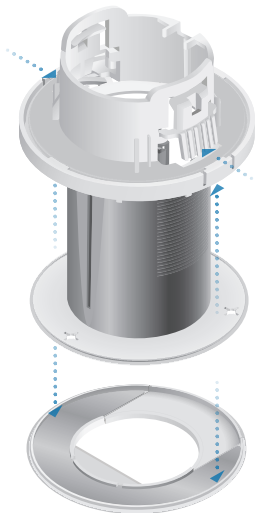

## Hardware Installation

The ceiling accessory can be installed in one of the following ceiling materials:

- **Soft Ceiling** Use for installation on removable ceiling tiles where you have rear access to the *Ceiling Mount Bracket*.
- **Hard Ceiling** Use for installation on hard lid ceilings where there is no rear access to the *Ceiling Mount Bracket*.
- **Drywall** Use for installation on drywall surfaces where *Screw Anchors* are required.

Proceed to the appropriate section for your installation.



**Note:** We recommend using the *Ceiling Backing Plate* in any installation where you have rear access to the *Ceiling Mount Bracket* once the camera has been installed.



**Note:** To change the viewing angle of the camera at any time:

- Tilt the lens up or down for vertical adjustment.
- Turn the base left or right for horizontal adjustment.




## Soft Ceiling Installation


1. Remove the ceiling tile.
2. Cut a 2 ¼-inch (57 mm) opening in the ceiling tile.
3. Place the *Ceiling Mount Bracket* through the opening in the ceiling.




**Note:** Ensure that the arrows on the *Ceiling Mount Bracket* point in the direction the camera will face.



4. Align the notches of the *Ceiling Backing Plate* with the tabs on the *Ceiling Mount Bracket*. Slide the *Ceiling Backing Plate* onto the *Ceiling Mount Bracket*. Then feed an Ethernet cable through the *Ceiling Backing Plate*, *Ceiling Mount Bracket*, and ceiling tile.




5. Connect one end of the Ethernet cable to the Ethernet port on the camera and the other end to a PoE 802.3af-compliant switch or compatible PoE adapter.



6. Align the notches on the camera with the tabs on the *Ceiling Mount Bracket*. Slide the camera up into the *Ceiling Mount Bracket*, locking into place.



7. Use a Phillips screwdriver to install the included *Installation Screw* through the *Ceiling Mount Bracket* and into the base of the camera.



8. Proceed to the *Mounting Cover Installation* section.




## Hard Ceiling Installation


1. Align the notches on the camera with the tabs on the *Ceiling Mount Bracket*. Slide the camera into the *Ceiling Mount Bracket*, locking into place.




2. Use a Phillips screwdriver to install the included *Installation Screw* through the *Ceiling Mount Bracket* and into the base of the camera.



- Cut a 2 ¼-inch (57 mm) opening in the ceiling and pull an Ethernet cable through the opening.




- Connect one end of the Ethernet cable to the Ethernet port on the camera and the other end to a PoE 802.3af-compliant switch or compatible PoE adapter.



5. Place the *Ceiling Mounting Bracket* through the opening in the ceiling.



**Note:** Ensure that the arrows on the *Ceiling Mount Bracket* point in the direction the camera will face.




6. Use the three *Screws* to secure the *Ceiling Mount Bracket* to the ceiling.



7. Proceed to the *Mounting Cover Installation* section.

## Drywall Ceiling Installation

1. Cut a 2 ¼-inch (57 mm) opening in the ceiling.
2. Place the *Ceiling Mount Bracket* through the opening in the ceiling. Using the *Ceiling Mount Bracket* as a template, mark the three screw holes.




**Note:** Ensure that the arrows on the *Ceiling Mount Bracket* point in the direction the camera will face.


3. Remove the *Ceiling Mount Bracket* from the ceiling opening and pre-drill the screw holes, using a 6 mm drill bit.
4. Align the notches on the camera with the tabs on the *Ceiling Mount Bracket*. Slide the camera into the *Ceiling Mount Bracket*, locking into place.




5. Use a Phillips screwdriver to install the included *Installation Screw* through the *Ceiling Mount Bracket* and into the base of the camera.




6. Insert the three *Screw Anchors* into the three screw holes and then feed an Ethernet cable through the ceiling.



7. Connect one end of the Ethernet cable to the Ethernet port on the camera and the other end to a PoE 802.3af-compliant switch or compatible PoE adapter.



8. Align the *Ceiling Mount Bracket* with the *Screw Anchors*.



9. To secure the *Ceiling Mount Bracket* to the ceiling, insert the three *Screws* into the three screw holes and *Screw Anchors*.




## Mounting Cover Installation

Once the ceiling accessory and camera have been installed in the ceiling, follow the steps below to install the *Mounting Cover*:


1. Unlock the *Mounting Cover* by sliding the tab out.



2. Place the open *Mounting Cover* over the camera and *Ceiling Mount Bracket*.



3. Lock the *Mounting Cover* into place by sliding the tab closed.





# Limited Warranty

## [www.ui.com/support/warranty](http://www.ui.com/support/warranty)

The limited warranty requires the use of arbitration to resolve disputes on an individual basis, and, where applicable, specify arbitration instead of jury trials or class actions.

# Declaration of Conformity

**Български [Bulgarian]** С настоящото UBIQUITI декларира, че този тип радиосъоръжение UVC-G3-F-C е в съответствие с Директива 2014/53/EU, 2014/30/EU & 2014/35/EU. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: [www.ui.com/compliance](http://www.ui.com/compliance)

**Hrvatski [Croatian]** UBIQUITI ovime izjavljuje da je radijska oprema tipa UVC-G3-F-C u skladu s Direktivom 2014/53/EU, 2014/30/EU & 2014/35/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi: [www.ui.com/compliance](http://www.ui.com/compliance)

**Čeština [Czech]** Tímto UBIQUITI prohlašuje, že typ rádiového zařízení UVC-G3-F-C je v souladu se směrnicí 2014/53/EU, 2014/30/EU & 2014/35/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese: [www.ui.com/compliance](http://www.ui.com/compliance)

**Dansk [Danish]** Hermed erklærer UBIQUITI, at radioudstyrtypen UVC-G3-F-C er i overensstemmelse med direktiv 2014/53/EU, 2014/30/EU & 2014/35/EU. EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: [www.ui.com/compliance](http://www.ui.com/compliance)

**Nederlands [Dutch]** Hierbij verklaar ik, UBIQUITI, dat het type radioapparatuur UVC-G3-F-C conform is met Richtlijn 2014/53/EU, 2014/30/EU & 2014/35/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: [www.ui.com/compliance](http://www.ui.com/compliance)

**English** Hereby, UBIQUITI declares that the radio equipment type UVC-G3-F-C is in compliance with Directive 2014/53/EU, 2014/30/EU & 2014/35/EU. The full text of the EU declaration of conformity is available at the following internet address: [www.ui.com/compliance](http://www.ui.com/compliance)

**Eesti keel [Estonian]** Käesolevaga deklareerib UBIQUITI, et käesolev raadioseadme tüüp UVC-G3-F-C vastab direktiivi 2014/53/EU, 2014/30/EU & 2014/35/EU nõuetele. ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: [www.ui.com/compliance](http://www.ui.com/compliance)

**Suomi [Finnish]** UBIQUITI vakuuttaa, että radiolaitetyyppi UVC-G3-F-C on direktiivin 2014/53/EU, 2014/30/EU & 2014/35/EU mukainen. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: [www.ui.com/compliance](http://www.ui.com/compliance)

**Français [French]** Le soussigné, UBIQUITI, déclare que l'équipement radioélectrique du type UVC-G3-F-C est conforme à la directive 2014/53/UE, 2014/30/UE & 2014/35/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante: [www.ui.com/compliance](http://www.ui.com/compliance)

**Deutsch [German]** Hiermit erkläre UBIQUITI, dass der Funkanlagentyp UVC-G3-F-C der Richtlinie 2014/53/EU, 2014/30/EU & 2014/35/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: [www.ui.com/compliance](http://www.ui.com/compliance)

**Ελληνικά [Greek]** Με την παρούσα ο/η UBIQUITI, δηλώνει ότι ο ραδιοεξοπλισμός UVC-G3-F-C πληροί την οδηγία 2014/53/ΕΕ, 2014/30/ΕΕ & 2014/35/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: [www.ui.com/compliance](http://www.ui.com/compliance)

**Magyar [Hungarian]** UBIQUITI igazolja, hogy a UVC-G3-F-C típusú rádióberendezés megfelel a 2014/53/EU, 2014/30/EU & 2014/35/EU irányelvnek. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen: [www.ui.com/compliance](http://www.ui.com/compliance)

**Íslenska [Icelandic]** Hér með lýsir UBIQUITI yfir því að UVC-G3-F-C er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 2014/53/EU, 2014/30/EU & 2014/35/EU. Fullur texti ESB samræmisýfirlýsing er að finna á eftirfarandi netfangi: [www.ui.com/compliance](http://www.ui.com/compliance)

**Italiano [Italian]** Il fabbricante, UBIQUITI, dichiara che il tipo di apparecchiatura radio UVC-G3-F-C è conforme alla direttiva 2014/53/UE, 2014/30/UE & 2014/35/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: [www.ui.com/compliance](http://www.ui.com/compliance)

**Latviešu valoda [Latvian]** Ar šo UBIQUITI deklarē, ka radioiekārta UVC-G3-F-C atbilst Direktīvai 2014/53/ES, 2014/30/ES & 2014/35/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: [www.ui.com/compliance](http://www.ui.com/compliance)

**Lietuvių kalba [Lithuanian]** Aš, UBIQUITI, patvirtinu, kad radijo įrenginių tipas UVC-G3-F-C atitinka Direktyvą 2014/53/ES, 2014/30/EU & 2014/35/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu: [www.ui.com/compliance](http://www.ui.com/compliance)

**Malti [Maltese]** B'dan, UBIQUITI, niddikjara li dan it-tip ta' taghmir tar-radju UVC-G3-F-C huwa konformi mad-Direttiva 2014/53/EU, 2014/30/EU & 2014/35/EU. Id-dikjarazzjoni ta' konformità tista' tigi kkonsultata minn [www.ui.com/compliance](http://www.ui.com/compliance)

**Norsk [Norwegian]** UBIQUITI erklærer herved at utstyret UVC-G3-F-C er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 2014/53/EU, 2014/30/EU & 2014/35/EU. Den fulle teksten til EU-samsvarserklæringen er tilgjengelig på følgende internetadresse: [www.ui.com/compliance](http://www.ui.com/compliance)

**Polski [Polish]** UBIQUITI niniejszym oświadcza, że typ urządzenia radiowego UVC-G3-F-C jest zgodny z dyrektywą 2014/53/EU, 2014/30/EU & 2014/35/EU. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: [www.ui.com/compliance](http://www.ui.com/compliance)

**Português [Portuguese]** O(a) abaixo assinado(a) UBIQUITI declara que o presente tipo de equipamento de rádio UVC-G3-F-C está em conformidade com a Diretiva 2014/53/EU, 2014/30/EU & 2014/35/EU. O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: [www.ui.com/compliance](http://www.ui.com/compliance)

**Română [Romanian]** Prin prezenta, UBIQUITI declară că tipul de echipamente radio UVC-G3-F-C este în conformitate cu Directiva 2014/53/UE, 2014/30/UE & 2014/35/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet: [www.ui.com/compliance](http://www.ui.com/compliance)

**Slovenčina [Slovak]** UBIQUITI týmto vyhlasuje, že rádiové zariadenie typu UVC-G3-F-C je v súlade so smernicou 2014/53/EU, 2014/30/EU & 2014/35/EU. Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: [www.ui.com/compliance](http://www.ui.com/compliance)

**Slovenščina [Slovenian]** UBIQUITI potrjuje, da je tip radijske opreme UVC-G3-F-C skladen z Direktivo 2014/53/EU, 2014/30/EU & 2014/35/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: [www.ui.com/compliance](http://www.ui.com/compliance)

**Español [Spanish]** Por la presente, UBIQUITI declara que el tipo de equipo radioeléctrico UVC-G3-F-C es conforme con la Directiva 2014/53/UE, 2014/30/UE & 2014/35/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: [www.ui.com/compliance](http://www.ui.com/compliance)

**Svenska [Swedish]** Härmed försäkrar UBIQUITI att denna typ av radioustrustning UVC-G3-F-C överensstämmer med direktiv 2014/53/EU, 2014/30/EU & 2014/35/EU. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: [www.ui.com/compliance](http://www.ui.com/compliance)

## Online Resources

Website [www.ui.com](http://www.ui.com)

Support [help.ui.com](http://help.ui.com)

Community [community.ui.com](http://community.ui.com)

Downloads [downloads.ui.com](http://downloads.ui.com)



Ubiquiti Inc.  
685 Third Avenue, 27th Floor  
New York, NY 10017  
USA

©2018-2019 Ubiquiti Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, the Ubiquiti beam logo, TOUGH Cable, UniFi, and UniFi Video are trademarks or registered trademarks of Ubiquiti Networks, Inc. in the United States and in other countries. All other trademarks are the property of their respective owners.

AJNB070219