


CP-UNC-TA41L3C-D-LQ

4MP Dual Light Bullet Camera - 30Mtr.

- 1/2.9" 4MP PS CMOS Image Sensor (0.8758 centimeters)
- Max. 4MP (2688 × 1520)@1-25/30fps/ (2560 × 1440)@1-25/30
- Instastream, H.265, H.264, H.264H, H.264B, MJPEG
- Support Triple stream
- WDR (120dB), Day/Night(ICR), 3D NR, ROI, AWB, AGC, BLC, HLC, Digital watermarking
- IR Range of 30 Mtr., Warm Light Range of 30 Mtr.
- 3.6mm fixed Lens
- Support Built-in Mic, PoE, IP67

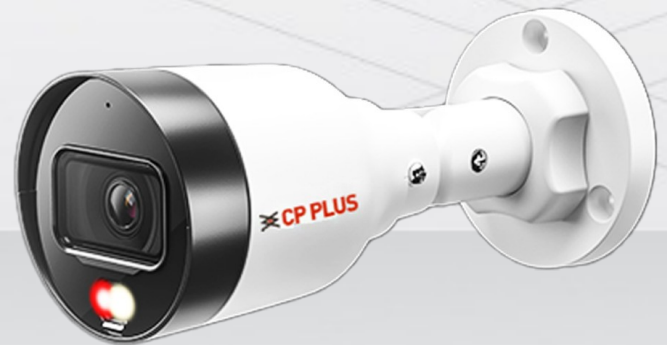

iiuMAX
Dual Light

System Overview

The CP PLUS Advanced Dual Light Cameras provide the perfect solution for elevating your security system. Designed for superior adaptability, these cameras support multiple illumination modes and advanced monitoring features, ensuring unmatched performance in various environments.

CTC Technology:

CP PLUS Trusted Core Technology is a multi-layered security architecture that brings together the best of cyber security practices and technological intelligence. It is not just an enhancement; it is a complete redefinition of how surveillance should function in today's digital landscape - more intelligent, more secure, and more reliable than ever before.



CP-UNC-TA41L3C-D-LQ

4MP Dual Light Bullet Camera - 30Mtr.

Functions

Instastream

This camera has been designed with the latest and most efficient innovation among the standard video compression designs. Smart encoding algorithms developed by CP PLUS help in saving up to 70% more bandwidth than H.265 along with making it more beneficial for minimizing bandwidth and storage costs. It enhances video coding efficiency while providing high resolution and the rate of frame in the video using Intelligent Region Perception to detect motion in each frame.

Regions of interest

Regions of Interest (ROI) is a user defined feature that allows the operator to monitor specific areas of a scene while still maintaining overall situational awareness of less important areas.

True Day/Night

When the scene is too dark, the image is captured by illuminating an infrared light through the camera onto the scene that greatly helps with making the scene visible for the lens. It delivers color images during the day and automatically switches to the monochrome feature as the scene darkens.

Power over Ethernet (PoE)

CP PLUS cameras with Power over Ethernet (PoE) technology offer a simple and efficient installation by using a single Ethernet cable to deliver both power and data. This eliminates the need for separate power adapters, reduces cable clutter, and ensures a cleaner setup.

About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedented levels even when compared to international competitors.



CP-UNC-TA41L3C-D-LQ

4MP Dual Light Bullet Camera - 30Mtr.


| Feature | Specification |
|-------------------------|---|
| Image Sensor | 1/2.9" 4MP PS CMOS Image Sensor (0.8758 centimeters) |
| Effective Pixels | 2688 (H) × 1520 (V) |
| Minimum Illumination | 0.06 lux@F1.6 (Color, 30 IRE), 0.006 lux@F1.6 (B/W, 30 IRE), 0 lux (IR on) |
| Angle Adjustment | Pan: 0°–360°, Tilt: 0°–90°, Rotation: 0°–360° |
| Shutter Speed | Auto/Manual 1/3 s–1/100,000 s |
| White Balance | Auto, Natural, Street lamp, Outdoor, Manual, Regional custom |
| RAM | 128 MB |
| ROM | 128 MB |
| DORI Distance | Lens 3.6 mm: 85.4 m (Detect), 34.2 m (Observe), 17.1 m (Recognize), 8.5 m (Identify) |
| Gain Control(AGC) | Auto/ Manual |
| Lens Type | Fixed-focal |
| Max. Aperture | F1.6 |
| Lens Mount | M12 |
| Close Focus Distance | 1.7 m |
| Lens | 3.6mm fixed Lens |
| IR Number | 1 (Multi-core (IR + warm) light) |
| IR | IR Range of 30 Mtr. |
| Warm Light | Warm Light Range of 30 Mtr. |
| Smart Illumination | Support |
| IR Control | Auto, Manual |
| S/N Ratio | > 56 dB |
| Angle of View | 3.6 mm: H: 78°, V: 40°, D: 93° |
| Back Light Compensation | BLC/ HLC/ WDR(120dB) |
| Resolution | 4MP (2688 × 1520)/ (2560 × 1440), 3MP (2304 × 1296), 2MP (1920 × 1080), 1.3MP (1280 × 960), 720p (1280 × 720), D1 (704 × 576 / 704 × 480), VGA (640 × 480), CIF (352 × 288 / 352 × 240) |

| Feature | Specification |
|-------------------|---|
| Video Compression | Instastream, H.265, H.264, H.264H, H.264B, MJPEG (Only supported by sub stream) |
| Audio | Built-in Mic |
| Noise Reduction | 3D NR |
| Motion detection | OFF/ON (4 areas, rectangular) |
| Video format | PAL/NTSC |
| Stream Capability | Triple stream |
| Frame Rate | Main stream: 4MP (2688 × 1520)@1-25/30fps/ (2560 × 1440)@1-25/30 Sub stream 1: 720P(1280 × 720), D1 (704 × 576)@1-25 fps/ (704 × 480)@1-30 fps, VGA(640 × 480)@1-30fps, CIF (352 × 240)@1-30fps, (352 × 288) @1-25fps Sub stream 2: D1 (704 × 576)@1-25 fps/ (704 × 480)@1-30 fps, VGA(640 × 480)@1-30fps, CIF (352 × 240)@1-30fps/ (352 × 288) @1-25fps |
| Privacy Mask | 4 areas |
| ROI | Support (4 areas) |
| OSD | Camera title, Date & Time |
| Audio Compression | G.711a, G.711Mu, PCM, G.726, AAC |
| Bit Rate Control | CBR/ VBR |
| Bit Rate | H.265: 3 kbps-6144 kbps, H.264: 8 kbps-6144 kbps |
| Protocol | SFTP, IPv6, IPv4, DNS,RTCP, NTP, RTP, HTTP, HTTPS, SNMP V3, TLS Version 1.2, TCP/IP, PPPoE, NFS, UDP, ICMP, IGMP, SSL, DHCP, SMTP, RTSPS, ONVIF (Profile S, Profile G, Profile T), unicast, multicast |
| Day/Night | Auto(ICR)/Color/B/W |
| SDK and API | Support |
| Ethernet | RJ-45 (10/100 Base-T) |
| Alarm Event | Network disconnection, IP conflict, illegal access, Motion detection, Video tampering, Audio detection, Security exception, SMD (human & Motor Vehicle) |
| Cyber Security | AES 256-bit Encryption, Configuration encryption, trusted execution, Digest, security logs, WSSE, account lockout, syslog, video encryption, IP/MAC filtering, HTTPS, trusted upgrade, trusted boot |
| SMD | Support the classification and accurate detection of human and vehicle |
| Mirror Function | Support |
| Smart search | Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos |
| Smart IR | Support |

| Feature | Specification |
|-----------------------|---|
| Image Rotation | 4MP only support 0°/180° 2MP & lower will support 0°/90°180°/270° |
| User/Host | 6 (Total bandwidth: 36 M) |
| Browser | IE, Chrome, Firefox |
| Iris Control | Fixed |
| Certificates | ISO 9001: 2015, ISO 20000-1 : 2018, CE, FCC and RoHS, BIS, STQC approved compliance report |
| Power Source | 12 VDC/ PoE (802.3af) |
| Power Consumption | Basic: 1.6 W (12 VDC), 2.0 W (PoE); Max. : 3.7 W (12 VDC), 4.7 W (PoE) (H.265 + intelligence on + WDR+ warm light intensity) |
| Weatherproof Standard | IP67 |
| Operating Temperature | −40 °C to +60 °C (−40 °F to +140 °F) |
| Operating Humidity | ≤95%(RH), non-condensing |
| Storage Temperature | −40 °C to +60 °C (−40 °F to +140 °F) |
| Storage Humidity | ≤95%(RH), non-condensing |
| Dimension | 162.6 mm × 70 mm× 70 mm |
| Casing | Metal + Plastic |
| Weight | 220g |

Published Date –19-08-2025

Dimensions (mm/inch)

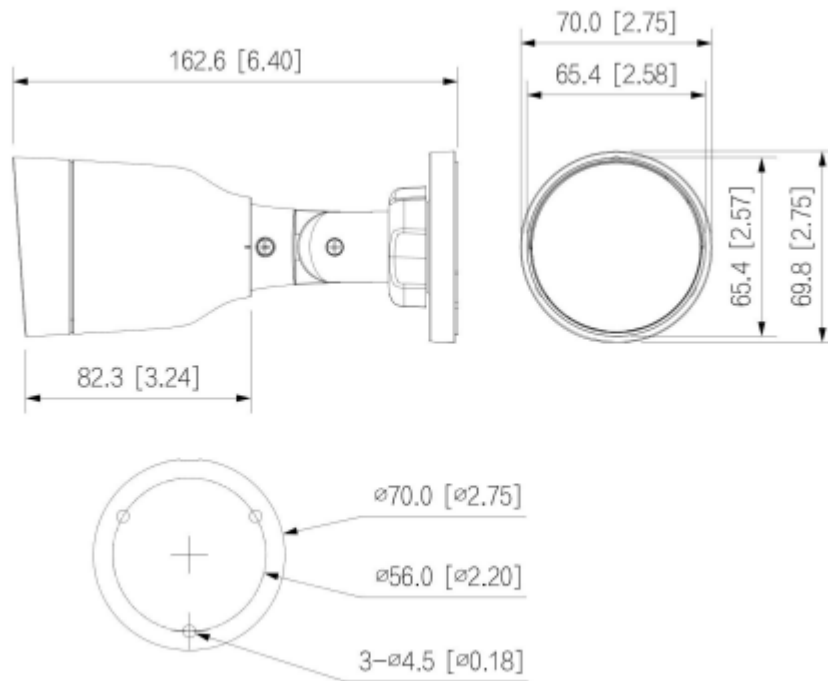

Company Name:

CP PLUS (Aditya Infotech Ltd.)

F-28 Okhla Industrial Area, Phase 1,

New Delhi 110020, INDIA

Contact Mail ID :- customercare@cpplusworld.com