

4MP Outdoor IR Motorized Varifocal Bullet Network Camera

MODEL: InSight S345ZI



Human & Vehicle Classification

Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.





Smart Detection



Intrusion Detection



Line-Crossing Detection



Object Removal Detection



Object Abandoned Detection



Scene Change Detection



Region Entering Detection



Region Exiting Detection



Loitering Detection




Abnormal Sound Detection

// VIGI Surveillance Solution


The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

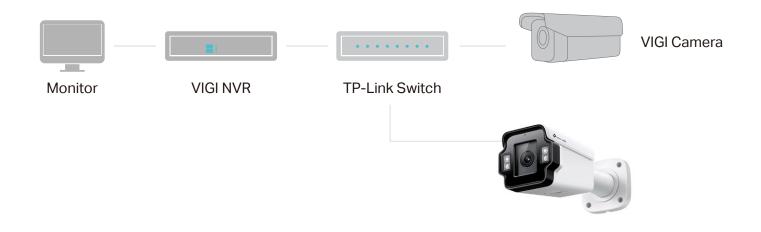

I Flexible Installation

Find the perfect vantage point by simply securing your camera to the ceiling, wall, or pole.*

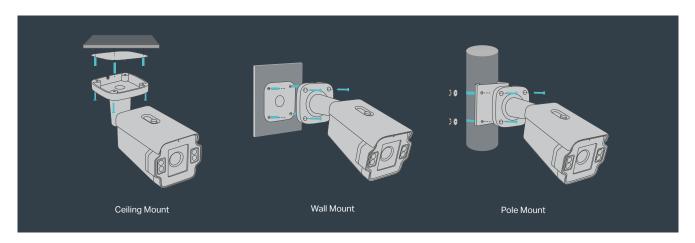

Specifications

Camera	
Product Model	InSight S345ZI
Image Sensor	1/2.9" Progressive Scan CMOS
Shutter Speed	1/3 to 1/10000 s
Slow Shutter	Yes
Min. Illumination	Color: 0.005 Lux; 0 Lux with IR
Day/Night Mechanism	IR Cut Filter
Day/Night Switch	Unified/ Scheduled/ Auto
Lens	
Туре	Motorized Varifocal Lens
Focal Length	2.7-13.5 mm (5X Optical Zoom)
Aperture	F1.6
FOV	 2.7-13.5 mm: Horizontal FOV: 29.6°-102.0° Vertical FOV: 16.8°-53.8° Diagonal FOV: 34.1°-122.8°
Lens Mount	φ14
DORI Distance	2.7-13.5 mm: • Detect: 66-207 m (217-579 ft) • Observe: 28-86 m (92-282 ft) • Recognize: 13-41 m (43-135 ft) • Identify: 7-21 m (23-69 ft)
Angle Adjustment (Manual)	
Range	Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360°
Illuminator	
IR LED	Quantity: 4 Range: 60m Wavelength: 850nm
Illuminator On/Off Control	Auto/Scheduled/Always on/Always off


Video		
Max. Resolution	2688*1520	
Main Stream	 Frame Rate: 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 2688x1520, 2560x1440, 2304x1296, 2048x1280, 1920x1080 Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps. 	
Sub-Stream	 Frame Rate: 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 1280x720, 848x480, 704x576, 640x480, 640x360, 352x288, 320x240 Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps. 	
Bit Rate Control	CBR, VBR	
Video Compression	Main Stream: H.265+/H.265/H.264+/H.264Sub-Stream: H.265/H.264	
H.264 Type	High Profile	
H.264+	Main Stream Supported	
H.265 Type	Main Profile	
H.265+	Main Stream Supported	
Video Bit Rate	Main Stream: 256 Kbps to 6 MbpsSub-Stream: 512 Kbps to 1024 Kbps	

Image		
Image Settings	 Mirror Brightness Contrast Saturation Sharpness Exposure WDR White Balance Prevent Overexposure to Infrared Light HLC Adjustable by Client Software 	
Image Enhancement	BLC/3D DNR/HLC/SmartIR	
Wide Dynamic Range	120dB	
SNR	≥ 52 dB	
Image Parameters Switch	Yes	
Privacy Mask	Up to 4 Masks	
ROI	1 Region	
OSD Setting	Yes	
Audio		
Audio Communication	Two-Way Audio	
Audio Input	Yes	
Audio Output	Yes	
Audio Compression	Yes	
Audio Sampling Rate	8KHz	
Environment Noise Filtering	Yes	
Audio Bit Rate	64 Kbps (G.711 alaw)	
Network		
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS, FTP/SFTP, RTP, IPv4, IPv6, ARP	
ONVIF	Yes	
API	Open Network Video Interface (Profile S/T/G)	

Simultaneous Live View	3 Main Streams & 3 Sub-Streams
Client	VIGI App, VIGI Security Manager, Web UI, VIGI VMS, VIGI Cloud VMS
Web Browser	• Google Chrome® 57 and above
	• Firefox® 52 and above
	• Safari® 11 and above
	Microsoft® Edge 91 and above
Cloud	Yes
Security	Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication
Alarm and Event Management	
	Intrusion Detection
	• Line-Crossing Detection
	Region Entering Detection
	Region Exiting Detection

Alaim and Event Manageme	·
Smart Event	Intrusion Detection
	Line-Crossing Detection
	Region Entering Detection
	Region Exiting Detection
	Object Abandoned Detection
	Object Removal Detection
	Loitering Detection
	People Detection
	Vehicle Detection
	Abnormal Sound Detection
	Scene Change Detection
Basic Event	Motion Detection (Enhanced with Human & Validate Older if a string for years as a supplied to the string for years and a string for years.)
	Vehicle Classification for more accurate alerts)
	Video Tampering Detection
	Exception (Illegal Login)
	Memory Card Video Recording
	Message Push
Alarm Linkage	Audible Warning
Alaitti Liitkage	Email Alarm
	Upload Capture to FTP
	Alarm Out Device
Linkage Method	N/A
Output Notification	Message Push
	• Email Alarm
	Upload Capture to FTP

Interface	
Network Interface	1 RJ45 10/100M Self-Adaptive Ethernet Port, PoE
On-board Storage	Built-In Memory Card Slot, Support MicroSD Card, up to 512 GB**
Built-in Speaker	N/A
Built-in Microphone	Yes; Records Anything Going on within a 15-ft Radius of the Camera
Audio	1 Audio In, 1 Audio Out
Alarm	1 Alarm In, 1 Alarm Out
Reset Button	Yes
Power	DC Power Port
General	
Operating Temperature	-30-60 °C
Storage Temperature	-40–60 °C
Operating Humidity	95% or Less (Non-Condensing)
Storage Humidity	95% or Less (Non-Condensing)
Package Contents	VIGI Network CameraQuick Start GuideWaterproof Cable AttachmentsMounting Accessories
Power Supply	 12V DC ± 5%, Max.10.8 W, 5.5 mm Coaxial Power Plug PoE: 802.3af/at, class 0, Max.12 W
Protection	IP67 Weatherproof, IK10 Vandal Proof
Material	Metal
Product Dimensions	10.1 × 3.9 × 4 in (256 × 100 × 101 mm)
Certifications	CE, NTRA, VCCI, KC, BSMI, FCC, IP67, IK10, ONVIF

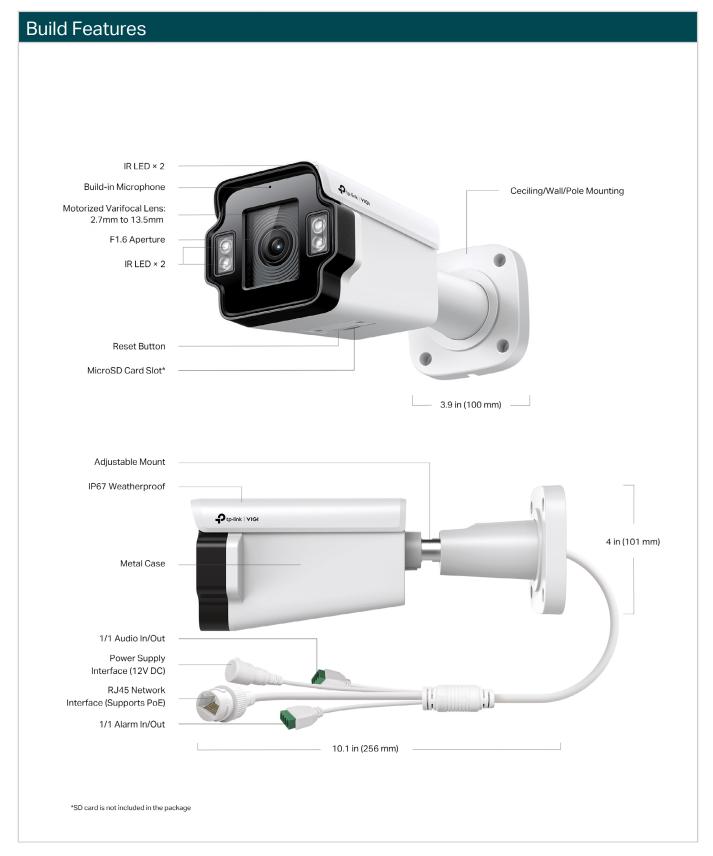

- *Pole mounting kit is not included in the package.
- **Micro SD card is not included in the package.
- ***Calculations based on laboratory testing using a 3MP VIGI camera, and an actual performance may vary according to the amount of activity recorded, resolution and other variables.

Specifications are subject to change without notice and can be found at www.tp-link.com.

©2024 TP-Link