

[WiFi](#)
[Switching](#)
[Cloud Keys & Gateways](#)
[Camera Security](#)
[Door Access](#)
[Managed VoIP](#)
[New](#)



Camera Security > [G5 Turret Ultra](#)

Datasheet

In The Box

Marketing Images

Installation Guide

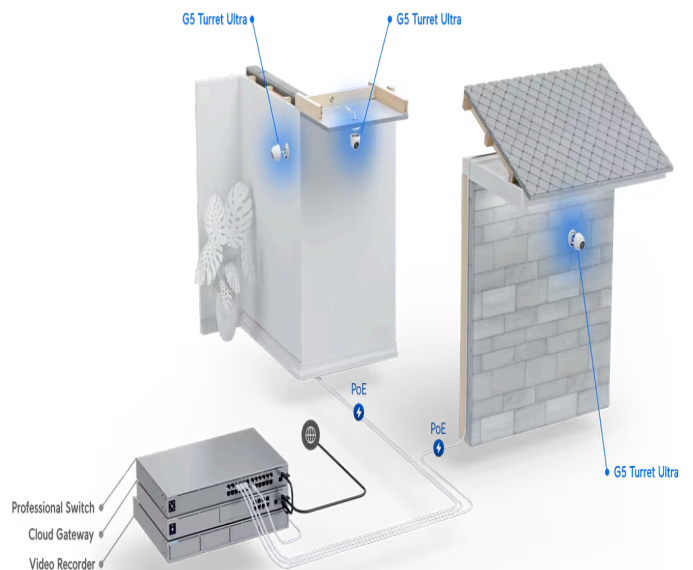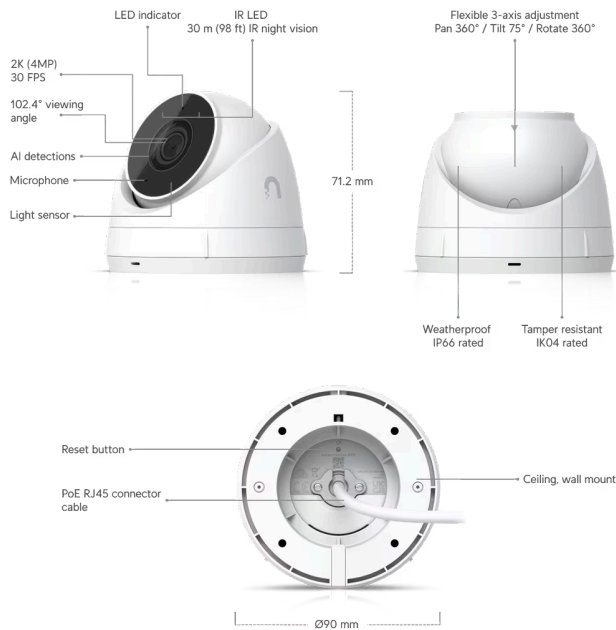

## Mechanical

### Dimensions

Ø90 x 71.2 mm (Ø3.5 x 2.8")

### Weight

330 g (11.6 oz)

### Enclosure material

Aluminum alloy, UV-stabilized polycarbonate

### Weatherproofing

IP66

### Resistance

IK04

### Cable jacket enclosure dimensions

Ø20 x 70.6 mm (0.8 x 2.8")

<b>Cable jacket enclosure materials</b>	Thermoplastic elastomer, polycarbonate, silicone rubber
<b>Cable length</b>	30 cm (1 ft)
<b>Cable diameter</b>	5 mm (0.2")
<b>Cable jacket material</b>	Polycarbonate
<b>Cable connector type</b>	RJ45

---

## Optics

<b>Sensor</b>	1/2.4" CMOS
<b>Lens</b>	Fixed focal length
<b>View angle</b>	H: 102.4°, V: 54.9°, D: 120.6°
<b>Night mode</b>	Built-in IR LED illumination and IR cut filter

---

## Video

<b>Resolution</b>	4MP 2688 x 1512 (16:9)
<b>Max. frame rate</b>	30 FPS
<b>Image settings</b>	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay

---

## System

<b>Processor</b>	Dual-core Arm® Cortex®-A7 based chip
<b>Networking interface</b>	10/100 MbE RJ45 port
<b>Max. power consumption</b>	4W
<b>Power method</b>	PoE
<b>Supported voltage range</b>	37-57V DC
<b>LED</b>	R/G/B/W
<b>Button</b>	Factory reset
<b>Mounting</b>	Surface mount
<b>Ambient operating temperature</b>	-30 to 50° C (-22 to 122° F)

**Ambient operating humidity** 0 to 90% noncondensing

**Certifications** FCC, IC, CE

---

## Audio

**Microphone** Yes (Can be disabled)

### Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.