

UniFi UISP Branding

Search UniFi products

Switching

WiFi

Camera Security

Door Access

CloudKeys & Gateways

Power Tech

New I



Utility > [Flex Mini 2.5G](#)

Datasheet

In The Box

Marketing Images

Installation Guide

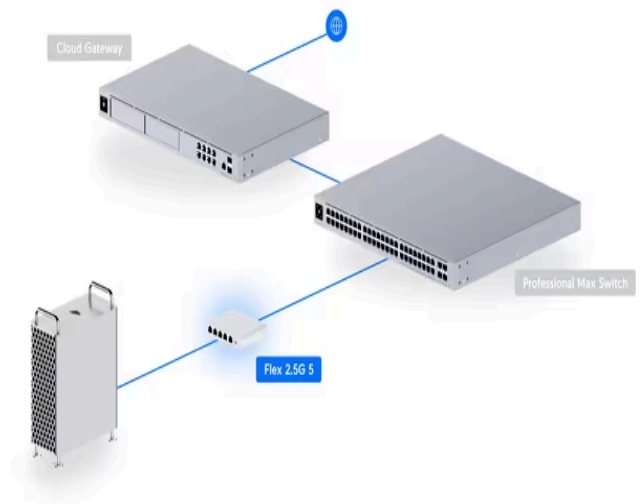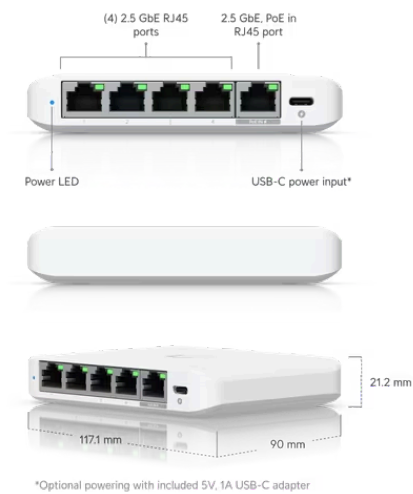

Mechanical

Dimensions 117.1 x 90 x 21.2 mm (4.6 x 3.5 x 0.8")

Weight 206 g (7.3 oz)

Enclosure material Polycarbonate

Hardware

Management interface Ethernet In-Band

Networking interface (5) 1/2.5 GbE RJ45 ports

Total non-blocking throughput 12.5 Gbps

Switching capacity	25 Gbps
Forwarding rate	18.6 Mpps
Power method	(1) AC power adapter, 5V DC, 1A (1) PoE (PairA 1, 2+; 3, 6-)(PairB 4, 5+; 7, 8-)
Power supply	External AC/DC adapter UniFi PoE switch
Supported voltage range	AC/DC input: 5V DC PoE input: 44—57V DC
Max. power consumption	AC/DC input: 5W PoE input: 6.4W
Button	Factory reset
Ambient operating temperature	-20 to 45° C (-4 to 113° F)
Ambient operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

Switching Features

Layer 2 features	STP / RSTP with priorities and port-level disable Port isolation Storm control Port mirroring Multicast / broadcast rate limiting Flow control Jumbo frames Egress rate limit
Layer 3 features	-

LEDs

System	(1) Blue/white: power Blinking white: bootup in progress Blinking blue: firmware upgrading Steady white: factory defaults; unit is awaiting adoption Steady blue: unit is adopted
Ethernet	(5) Green: link/activity

Application Requirements

UniFi Network

Version 8.4.62 and later

Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.