




Revolutionary Products For The ISPs / WISPs

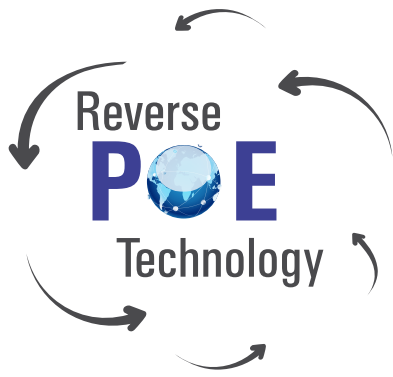

NS-RP071F-13T-OD
NS-RP071F-15T-OD

An Outdoor Reverse PoE Switch with Fiber Uplink Port



An Outdoor Reverse PoE Switch with Fiber Uplink Port



This switch is the combination of Reverse PoE Switch & Fiber Media Converter. This switch has Fiber Uplink Port(Single Fiber - SC), so no need of Fiber Media converter at last mile building. With Fiber Uplink Port ISPs can share Single Fiber Uplink with multiple client by using Ethernet cable. This switch can be powered using any standard PoE Injector (24VDC, 0.5~1 AMP). RPoE Switch can draw the necessary power even from a single client. This eliminates the need of UPS / Power Backup at building top. No need to pay to the Building Owner / Any Client for 24 power backup. Overall the RPoE switch saves a lot of money and time for ISPs.


FEATURES

- ▲ **Intelligent Power Management Feature :** Switch can be powered using reverse power from customer using any standard PoE Injector(24VDC, 0.5~1Amp).
- ▲ **Supports Auto-Negotiation :** Each of the switch ports automatically detect whether connected network devices are running at 10Mbps / 100Mbps and adjusts the speed and mode accordingly ensuring easy and hassle-free operation.
- ▲ **Supports Non-Blocking Wire Speed :** The switch forwards and receives traffic seamlessly with its non-blocking wire-speed.
- ▲ **Port Based Isolation :** Data of the uplink port can be transfer to any of the downlink ports but the individual downlink ports can't communicate with each other. Port isolation can be enabled/disabled using DIP button.
- ▲ **Surge Protection :** Surge protection provided on each port to protect against high voltage surge on data ports.
- ▲ **Over Voltage Protection :** Over voltage protection is provided on each data port to eliminate damage caused by high voltage PoE injectors. The switch will stop working if the client connects more than 24VDC PoE injector, the switch will start working again once this high voltage source is removed.
- ▲ **Over Current Protection :** Over current protection is provided to eliminate damage caused due to high current flow.
- ▲ **Cascading :** Switches can be cascaded for more user. NS-8FE-RP & NS-RP071P-OD are used for cascading with other RPoE models.


TECHNICAL SPECIFICATION

Fiber Uplink Port	1 x 10/100Mbps Fiber Port SC Connector For NS-RP071F-13T-OD : Tx:1310nm, Rx:1550nm For NS-RP071F-15T-OD : Tx:1550nm, Rx:1310nm
Ethernet Downlink Port	7 x 10/100Mbps Data + PoE In Ports
Standards	IEEE Std. 802.3 10BASE-T IEEE Std. 802.3u 100BASE-TX IEEE Std. 802.3x Flow control and Back-pressure IEEE Std. 802.3az Energy Efficient Ethernet
Protocols	CSMA/CD
Transmission Method	Store and Forward
MAC Address	1K MAC address
Maximum Forwarding Packet Length	1536 bytes
Filtering / Forwarding Rates	100Mbps Port – 148,800pps 10Mbps Port – 14,880pps
LEDs	Green : ON - Device On Stable
	Blue(Port 8) : ON - Link Activate, Flashing - Data Transmission
	Red(Ethr 1 to 7) : ON - Link Activate, Flashing - Data Transmission
Input Voltage (PoE In)	24VDC Power over Ethernet
No. of Ethernet Ports that can Power ON the Switch	Anyone / All of the seven Downlink Ports
Cascading	Switches Can be Cascaded for more User
Network Cable	4-pair UTP Cat 5 / Cat 6 cable
CAT-5 / Cat-6 Cable Data Lines	Pin 1,2 & Pin 3,6
CAT-5 / Cat-6 Cable Power Lines	+VDC : Pin 4,5 & -VDC : Pin 7,8
Power consumption	2 Watt (for Switch)
Operating Temperature	0° to 60°C
Storage environment	-20° to 80°C
Operating Humidity	20% to 95% (non-condensing)
Dimensions	185 x 55 x 149 mm
Net Weight	0.38 Kg

APPLICATION DIAGRAM

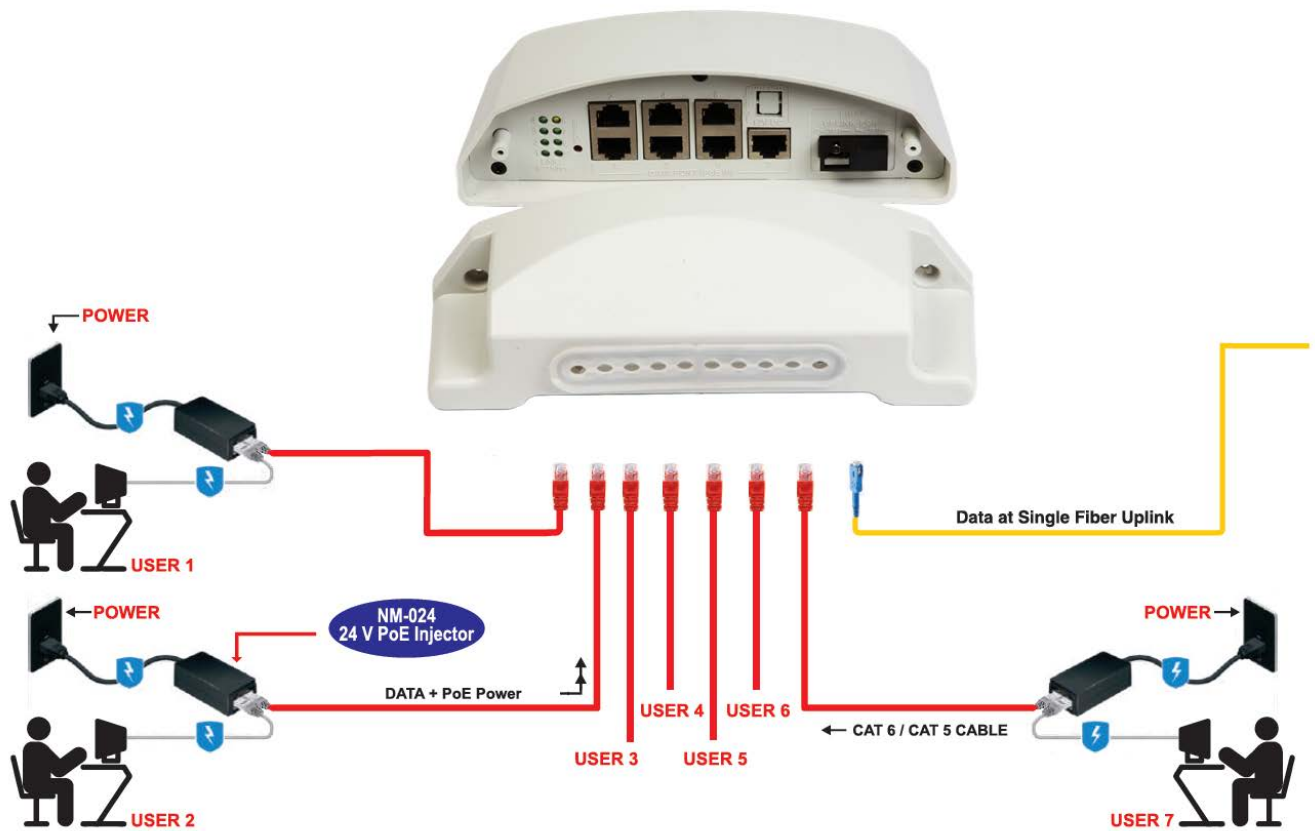

CASCADING DIAGRAM

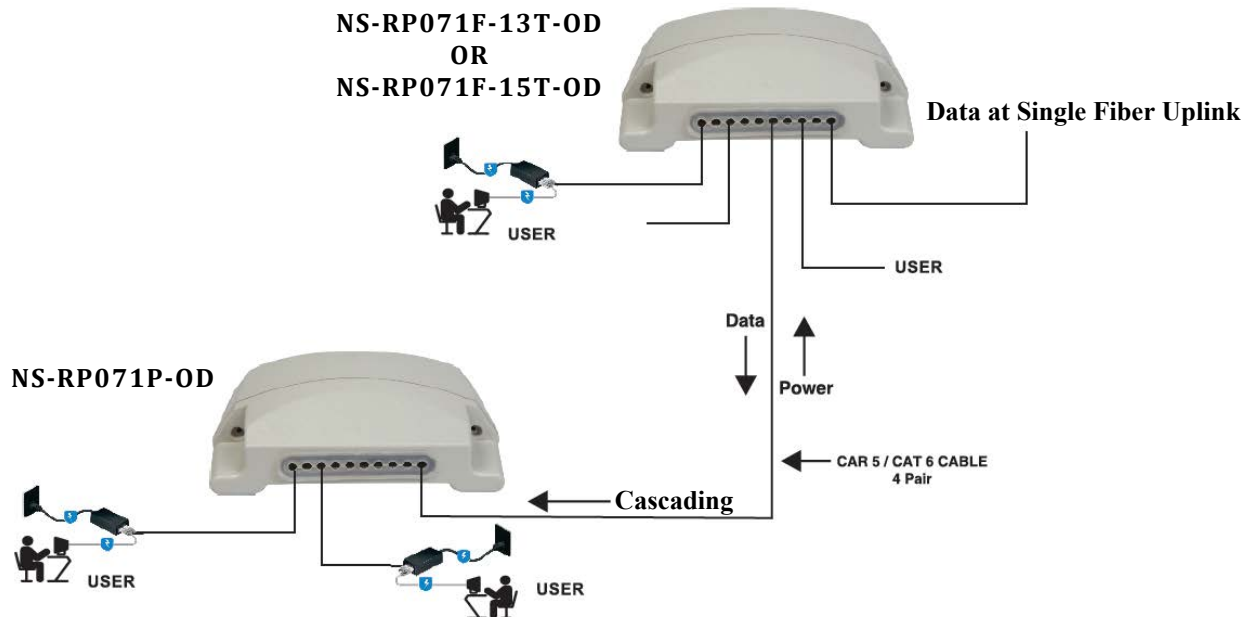

Infonet Technologies

19, Limbani Complex,
Ambli Bopal Road,
Ahmedabad - 380058, Gujarat, INDIA.

+91 79 26764812

+91 9687688966

switch@netstar.in

www.netstar.in

