



TSW114

GIGABIT DIN RAIL ETHERNET SWITCH



Energy &
utilities



Enterprise



Industrial &
automation



Retail



Smart city

EASY MOUNTING

Integrated DIN rail bracket and front-facing ports

GIGABIT ETHERNET

5 x Gigabit Ethernet ports with speeds of up to 1000 Mbps

COMPACT & DURABLE

Rugged anodized aluminum housing that fits in your pocket

PLUG AND PLAY

No additional configuration needed

Ethernet

ETH	5 x ETH ports, 10/100/1000 Mbps, supports auto MDI/MDIX crossover
IEEE 802.3 series standards	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az

INDUSTRIAL PROTOCOLS

Profinet	Profinet Class A conformance (available with optional order code)
----------	---

Performance Specifications

Bandwidth (Non-blocking)	10 Gbps
Packer buffer	128 KB
MAC address table size	2K entries
Jumbo frame support	9216 bytes

Power

Connector	2-pin industrial DC power socket
Input voltage range	9 – 30 VDC
PoE (passive)	Possibility to power up through ETH1 ports, not compatible with IEEE802.3af, 802.3at and 802.3bt standards, Mode B, 9 - 30 VDC
Power consumption	Idle: 0.3 W / Max: 2.3 W

Physical Interfaces

Ethernet	5 x RJ45 ports, 10/100/1000 Mbps
Status LEDs	1 x Power LED, 10 x ETH status LEDs
Power	1 x 2-pin industrial DC power socket
Other	1 x Grounding screw

Physical Specification

Casing material	Anodized aluminium housing and panels
Dimensions (W x H x D)	113.1 x 27.4 x 80.5 mm
Weight	174 g
Mounting options	Integrated DIN rail bracket; wall mount and flat surface (additional kit needed)

Operating Environment

Operating temperature	-40 °C to 75 °C
Operating humidity	5% to 95% non-condensing
Ingress Protection Rating	IP30

Regulatory & Type Approvals

Regulatory	CE, UKCA, FCC, IC, CB, RCM, CITC, REACH, RoHS, WEEE, MTCTE
------------	--

EMC Emissions & Immunity

Standards	EN 55032:2015 + A11:2020 + A1:2020 EN 55035:2017 + A11:2020
-----------	--

ESD	EN 61000-4-2:2009
-----	-------------------

Radiated Immunity	EN IEC 61000-4-3:2020
-------------------	-----------------------

EFT	EN 61000-4-4:2012
-----	-------------------

Surge Immunity (AC Mains Power Port)	EN 61000-4-5:2014 + A1:2017
--------------------------------------	-----------------------------


CS	EN 61000-4-6:2014
----	-------------------

Safety


Standards	CE: EN IEC 62368-1:2020 + A11:2020 RCM: AS/NZS 62368.1:2022 CB: IEC 62368-1:2018
-----------	---

Hardware


FRONT VIEW

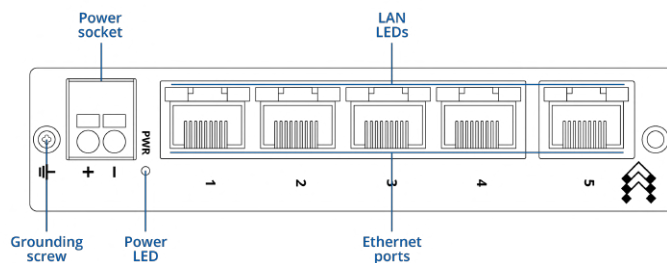


BACK VIEW

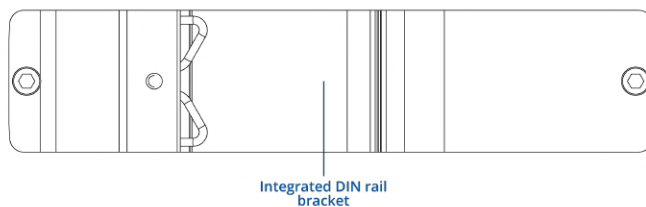

RJ45 LED MEANING



POWER SOCKET PINOUT

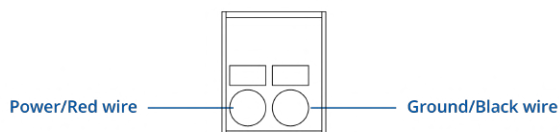

Ordering

Standard package*



TSW114



QUICK START GUIDE

*Standard package contents may differ based on standard order codes.

For more information on all available packaging options – please [contact us](#) directly.

Classification codes

HS Code: 851762

HTS: 8517.62.00

For more information on all available packaging options – please [contact us](#) directly.

Available versions

Hardware version	Supported frequencies	Standard order code / Package Contains
TSW114 *****0	N/A	TSW114000000 / Standard package without PSU TSW114000010 / Mass packing code
TSW114 *****1 Profinet Class A conformance	N/A	TSW114000001 / Standard package without PSU


TSW114 spatial measurements

Available versions

Device housing (W x H x D)	113.1 x 25 x 75.6 mm
Box (W x H x D):	175 x 35 x 150 mm


FRONT VIEW

The figure below depicts the measurements of device and its components as seen from the front panel side:

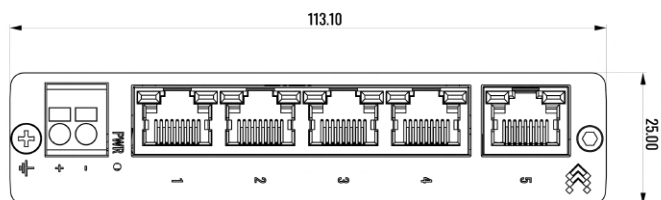


REAR VIEW

The figure below depicts the measurements of device and its components as seen from the back panel side:

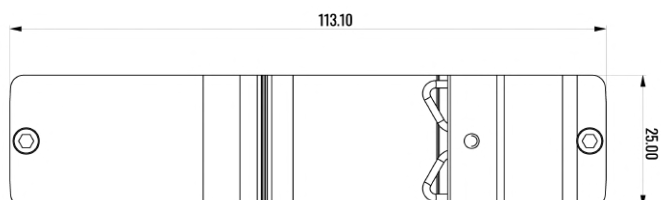


LEFT VIEW

The figure below depicts the measurements of device and its components as seen from the left:

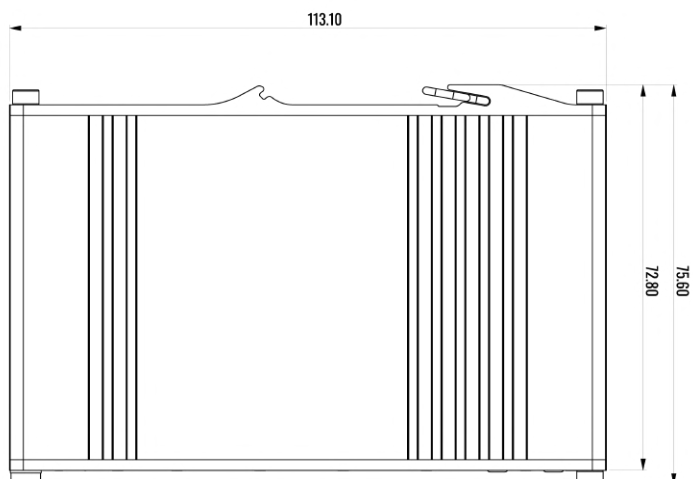

RIGHT VIEW

The figure below depicts the measurements of device and its components as seen from the right:

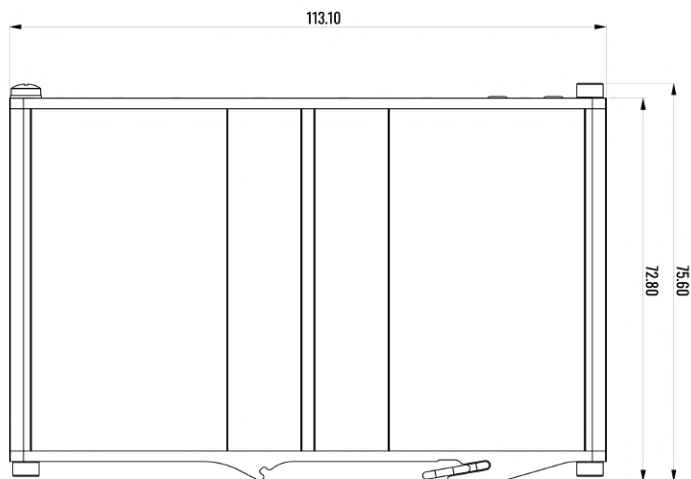

MOUNTING SPACE REQUIREMENTS

The figure below depicts an approximation of the device's dimensions when cables and antennas are attached:

