4MP Vandal Dome IP Camera



- High Resolution 4MP
- Compression techniques: H.265/H.264
- Ultra Low Illumination
- **Analytics Supported:** Human Detection, Scene Change, Motion Detection, Tampering Detection
  IP66, IK10 Compliant
- Dual Streaming
- 120dB Wide Dynamic Range

HD Resolution

Our X Series Camera features high-definition (HD) resolution, delivering clear and crisp image quality in various conditions. Whether the subject is stationary or moving, the camera performs reliably, capturing detailed and sharp images with impressive accuracy. Its advanced imaging ensures even fast-moving objects are recorded clearly, making it ideal for environments where dependable and detailed video footage is essential.






Cyber Security

The camera is designed to be secure and reliable in compliance with essential security requirements for CCTV systems, as outlined by relevant government standards. It incorporates advanced authentication methods, secure data transmission protocols, encryption, integrity protection mechanisms, and secure firmware management to ensure trusted operation and safeguard against unauthorized access or tampering.

Triple Streaming

Triple Streaming allows a CCTV camera to transmit three video streams at the same time—Mainstream for high-quality recording, Sub stream for smooth remote viewing, and a Third Stream for additional use. It ensures flexible performance across all platforms and helps optimize storage, streaming, and playback efficiency.

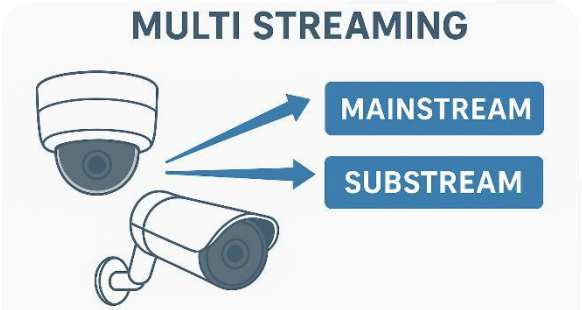

Technical Specifications:

Specifications	SC-INA40D-3L25
Camera	
Image sensor	1/2.8" Progressive CMOS Sensor
Effective Pixels	2560(H)X1440(V)
Min. Illumination	Color: 0.01 Lux @F2.0, B/W: 0.001 Lux@F2.0, 0 Lux at IR ON
S/N Ratio	>58dB
IR Distance	25m - 30m
Shutter Speed	1/50 sec ~ 1/10000 sec
IR On/Off Control	Auto/ Manual
IR LEDs	4 Array LEDs
Lens	
Lens Type	Fixed
Mount Type	M12
Focal Length	3.6mm (Optional: 2.8mm, 6mm, 2.8mm-12mm)
Max. Aperture	F2.0
Angle Of View	**2.8mm**: 105.2°(H) 71.5°(V) 110.8°(D) **3.6mm**: 89.6°(H) 58.4°(V) 97.2°(D) **6mm:** 61.5°(H) 37.1°(V) 69°(D) **2.8-12mm**: 105.2° to 33.5°(H), 71.5° to 19.3°(V), 110.8° to 37.7°(D)
Focus Control	Fixed
Video	
Compression	H.265/H.264
Streaming Capability	2 Streams
Resolution	4MP/2MP/D1/ VGA/CIF
Streams	**Mainstream:** 2560x1440(4MP),1920×1080(2MP)@25fps **Sub Stream:** 720x576 (D1), 640x480 (VGA), 352x288(CIF)@15fps
Bit Rate	211kbps-8192kbps
Bit Rate Control	CBR/VBR
Audio Compression	G.711 A/U
Day/ Night	ICR Switch/Automatic/Black and white
Exposure Mode	Automatic/Manual-(1/50 sec ~ 1/10000 sec)
BLC Mode	On/Off
HLC Mode	On/Off
WDR	Upto 120dB
White Balance	Automatic/Manual
Gain Control	Auto (<25dB)
Noise Filter	3D DNR (On/Off)
Anti - Flicker	Automatic/Manual(50Hz/60Hz)
AE Reference	1-255 Level
AE Sensitivity	1-10 Level

Image Settings	Brightness, Contrast, Hue, Saturation, Sharpness
Flip	0 °, 180°
Mirror	Off / On
Text Overlay	Title, Weekday, Date & Time
Privacy Masking	Yes (4 zones)
Events	
Motion Detection	Support
Tampering Detection	Support
Human Detection	Support
Scene Change	Support
Abnormality	No SD, SD Error, SD No Space
Event Actions	Alarm Output, Record, Snapshot, Email, Buzzer, FTP Upload
PTZ (Manual)	
Pan	0° ~360°
Tilt	0° ~90°
Rotation	0° ~360°
Safety	
Security	Authorized username and password, HTTPS with password, RTSP Validation, User Access Log, User Authentication, HTTPS; trusted upgrade, trusted boot; firmware encryption
ONVIF Authentication	ON, OFF
RTSP Authentication	Digest, None
Network	
Ethernet	10/100M adaptive Ethernet interface
Protocol	TCP/IP, UDP, IPv4, IPv6, HTTP, HTTPS, DHCP, DDNS, NTP, RTP, RTSP, RTSPS, SMTP, ICMP, IP Filter, FTP, SFTP, 802.1x, SNMP, Multicast
Interoperability	ONVIF Profile S, T
Max. user Access	20 Users
SDK/API	Support
Interface	
Audio	1In, 1Out, In-built microphone (Optional)
Alarm	1In, 1Out
SD card	Support upto 256GB
General	
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Ingress Protection	IP66
Vandalism Protection	IK10
Power supply	DC 12V ± 10%/ PoE (802.3af, class 3)
Power Consumption	Max 12W
Dimension & Weight	92mm(H) x 112mm(D), 480g
Product Certification	Safety: CE, FCC, IS/EN:60950-1, IS:13252 (Part 1): 2010, BIS Registered

Ordering Information:

Sr. No.	Ordering Model	Lens	Audio	SD Card	Alarm
1.	SC-INA40D-3L25	3.6mm	NA	NA	NA
2.	SC-INA40D-3L25 with SD Card	3.6mm	NA	Yes	NA
3.	SC-INA40D-3L25 with Audio, SD Card & Alarm	3.6mm	Yes	Yes	Yes
4.	SC-INA40D-3L25 —2.8mm lens	2.8mm	NA	NA	NA
5.	SC-INA40D-3L25 —2.8mm lens with SD Card	2.8mm	NA	Yes	NA
6.	SC-INA40D-3L25 —2.8mm lens with Audio, SD Card & Alarm	2.8mm	Yes	Yes	Yes
7.	SC-INA40D-3L25 —6mm lens	6mm	NA	NA	NA
8.	SC-INA40D-3L25 —6mm lens with SD Card	6mm	NA	Yes	NA
9.	SC-INA40D-3L25 —6mm lens with Audio, SD Card & Alarm	6mm	Yes	Yes	Yes
10.	SC-INA40D-3L25 —2.8mm-12mm lens	2.8mm-12mm	NA	NA	NA
11.	SC-INA40D-3L25 —2.8mm-12mm lens with SD Card	2.8mm-12mm	NA	Yes	NA
12.	SC-INA40D-3L25 —2.8mm-12mm lens with Audio, SD Card & Alarm	2.8mm-12mm	Yes	Yes	Yes

*Product specifications & appearance are subject to change without prior notice or obligation.