SILVER SERIES


5MP AHD Eco Dome Camera




- Progressive Scan Digital Image Sensor
- Supports Ultra Low Illumination
- Long-Distance Real-Time Transmission
- Selectable 4 in 1 Outputs
- NDAA Compliant

Ultra Low Illumination

Sparsh cameras can capture visible images in low light scenarios without the use of auxiliary lighting. High-quality sensors, image processing units, ISP/DSP and lens optics all contribute to cameras performing exceptionally well in low-light and night-vision environments.

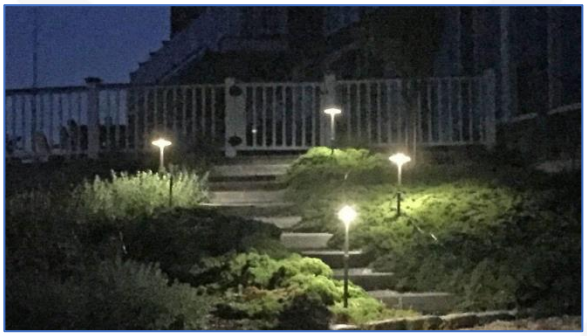

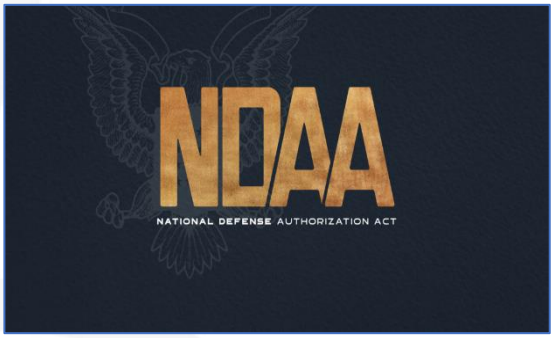

NDAA Compliant

Our HD Cameras are NDAA compliant that conform to the guidelines set by National Defense Authorization Act & do not use components made by the listed prohibited Manufacturers.

4 IN 1 Outputs (AHD-TVI-CVI-CVBS)

One camera with 4 different video standard outputs. Sparsh analog cameras can provide AHD/TVI/CVI/CVBS outputs as per the requirement. Outputs can be conveniently controlled by OSD.



sparsh cctv

SILVER SERIES

Technical Specifications:

Specifications	SCAE50D-31
Camera	
Image sensor	1/3" Progressive CMOS Sensor
Effective Pixels	2592(H)x1944(V)
Min. Illumination	0.01Lux @ (F1.2, AGC ON), 0 lux with IR on
S/N Ratio	>55dB
Shutter Speed	1/50 sec ~ 1/50000 sec
LEDs	12 Smart IR LEDs
IR Range	Up to 20Mtr
Signal System	PAL/NTSC
Lens	
Lens Type	Fixed
Mount Type	M12
Focal Length	3.6mm(Optional: 2.8mm, 6mm)
Max. Aperture	F2.0
Angle Of View	**3.6mm:** 78.6°, **2.8mm:** 105°, **6mm:** 51°
Focus Control	Fixed
Video	
Resolution	5MP@25fps
Image Setting	Color, Brightness, Sharpness
BLC Mode	On/Off
White Balance	Auto/Manual
Gain Control	Auto/Manual
Dynamic Range	80dB
Video Output Signal	HD Analog Output
Angle Adjustment	
Pan	0° ~360°
Tilt	0° ~90°
Rotation	0° ~360°
Interface	
Coaxial OSD Control	4 in 1 Outputs (AHD-TVI-CVI-CVBS)
Transmission Distance	Up to 500m over coaxial cable
General	
Material	Plastic Enclosure
Operating Conditions	-10° C ~ +60° C/ Less than 90% RH
Storage Conditions	-10° C ~ +60° C / Less than 90% RH
Ingress Protection	NA
Vandalism Protection	NA

Power supply	DC 12V ± 10%, 250mA
Power Consumption	Max 3.5W
Dimension & Weight	97mm(L) x 97mm(W) x 66mm(H), 140g
Product Certification	Safety: CE, FCC, IS/EN:60950-1, IS:13252 (Part 1): 2010, BIS Registered

*Product specifications & appearance are subject to change without prior notice or obligation.

MADE IN INDIA
MADE FOR THE WORLD