TSW040

8-port PoE+ Switch



Energy & utilities

Enterprise

Industrial & automation

Retail

Smart city

8 X POE-OUT RJ45

Eight PoE-out Ethernet ports with a total power budget of 240 W

2-PIN POWER INPUT

Simple and suitable for industrial applications

INTEGRATED DIN RAIL

Easy mounting for plug-and-play deployment

WIDE VOLTAGE RANGE

7-57 VDC, or 44-57 VDC for PoE-out

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

INDUSTRIAL PROTOCOLS	
Profinet	Profinet Class A conformance (available with optional order code)

Ethernet	
Ethernet	8 x ETH ports, 10/100 Mbps, supports auto MDI/MDIX crossover
IEEE 802.3 series standards	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az

POE OUT	
PoE+ ports	Port 1 - 8
PoE standards	IEEE 802.3af (PoE, Type 1) and IEEE 802.3at (PoE+, Type 2) compliant PSE ports, over spare pairs (Mode B)
PoE Max Power per Port (at PSE)	30 W
Total PoE Power Budget (at PSE)	240 W

Power	
Connector	2-pin industrial DC power socket
Input voltage range	7 – 57 VDC, overvoltage protection: 60Vmax, reverse polarity protection: 80Vmax, surge protection: min 64.4V/max 71.2V breakdown voltage, 93.6V maximum reverse voltage @4.3A maximum reverse surge current, 1- Vin, 2-PGND
PoE-Out input voltage range	44 – 57 VDC
Power consumption	Idle: 1 W / Max: 2 W / PoE Max: 246 W

Physical Interfaces	
Ethernet	8 x RJ45 ports, 10/100 Mbps
Status LEDs	1 x Power LED, 16 x ETH status LEDs
Power	1 x 2-pin industrial DC power socket
Other	1 x Grounding screw

Physical Specification	
Casing material	Anodised aluminium housing and panels
Dimensions (W x H x D)	113.1 x 41.2 x 74.6 mm
Mounting options	Integrated DIN rail bracket; wall mount and flat surface (additional kit needed)
Weight	280 g

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

Operating Environment	
Operating temperature	-40 °C to 75 °C
Operating humidity	5% to 95% non-condensing
Ingress Protection Rating	IP30

Regulatory & Type Approvals	
Regulatory	WEEE, CE, FCC, RCM, UKCA, IC(ISED), RoHS, CB Scheme, REACH, Kenya, ANRT, MTCTE

Performance Specifications	
Bandwidth (Non-blocking)	20 Gbps
Packer buffer	128 KB
MAC address table size	2K entries
Jumbo frame support	9216 bytes

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.


Certification

EMEA	TSW040 CE TSW040 UKCA TSW040 RoHS TSW040 REACH TSW040 Kenya TSW040 ANRT
APAC	TSW040 RCM TSW040 MTCTE
AMERICAS	TSW040 FCC TSW040 IC(ISED)
MISCELLANEOUS	TSW040 CB Scheme
SAFETY & ENVIROINMENTAL	TSW040 WEEE


Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

Hardware

FRONT VIEW

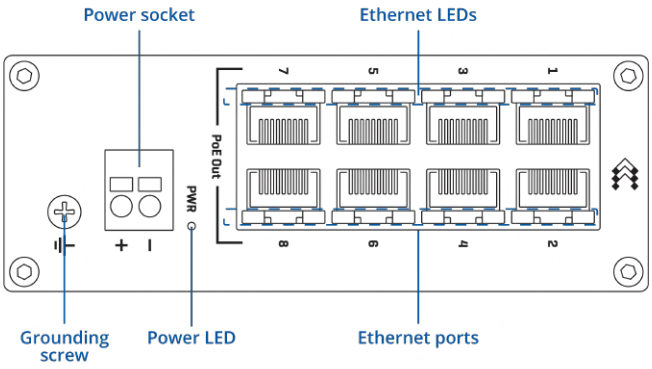


BACK VIEW

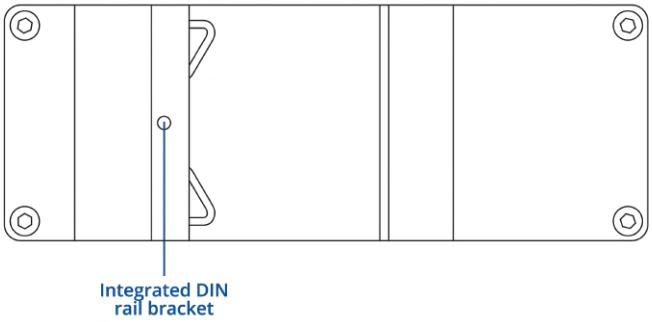

RJ45 LED MEANING



POWER SOCKET PINOUT



Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

Ordering

Standard package*



TSW040



QUICK START GUIDE

*Standard package contents may differ based on standard order codes.

For more information on all available packaging options – please contact us directly.

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

Classification codes

HS Code: 851762
HTS: 8517.62.00

For more information on all available packaging options – please contact us directly.

Available versions

Hardware version	Supported frequencies	Standard order code / Package Contains
TSW040 *****0	N/A	TSW040000000 / Standard package without PSU TSW040000200 / Standard package with US PSU without connector
TSW040 *****1 **Profinet Class A conformance**	N/A	TSW040000001 / Standard package without PSU


TSW040 spatial measurements

Available versions	
Device housing (W x H x D)*	74.6 x 41.2 x 113.1 mm
Box (W x H x D):	79.5 × 45.7 × 118.5 mm
	*Housing measurements are presented without antenna connectors and screws; for measurements of other device elements look to the sections below

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.


FRONT VIEW

The figure below depicts the measurements of device and its components as seen from the front panel side:

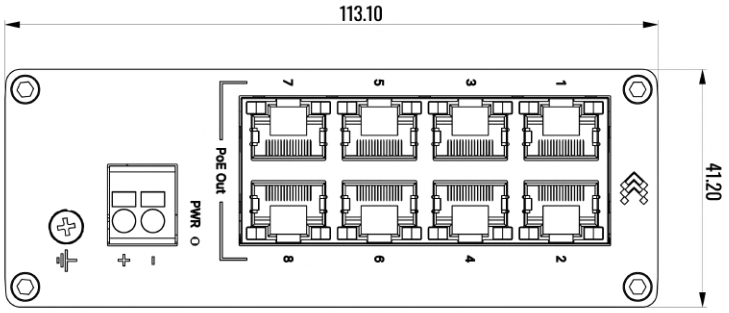


REAR VIEW

The figure below depicts the measurements of device and its components as seen from the back panel side:

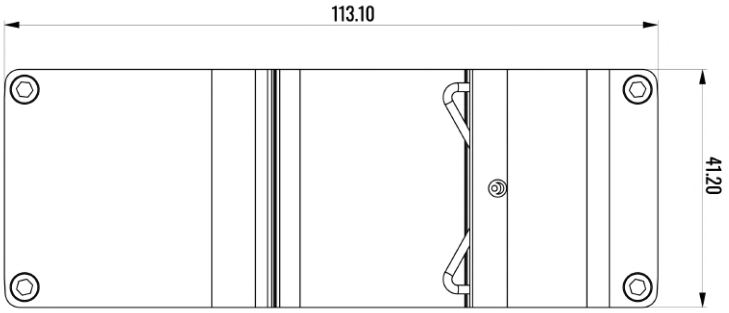

LEFT VIEW


The figure below depicts the measurements of device and its components as seen from the left:

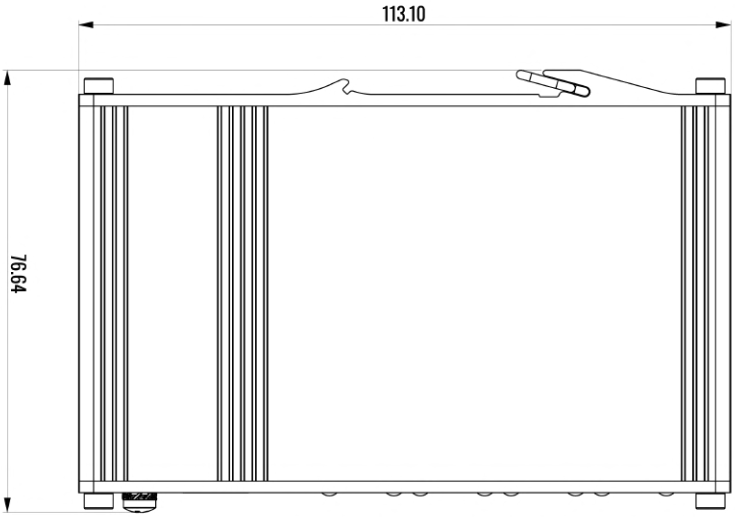

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.


RIGHT VIEW

The figure below depicts the measurements of device and its components as seen from the right:

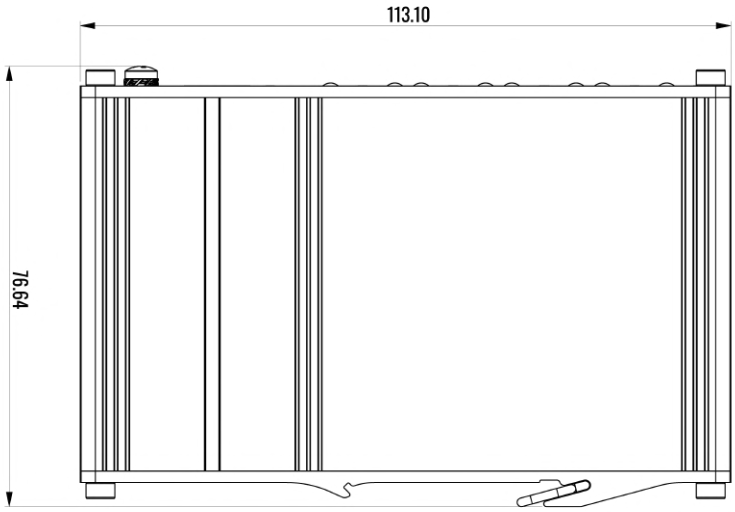

MOUNTING SPACE REQUIREMENTS

The figure below depicts an approximation of the device's dimensions when cables and antennas are attached:

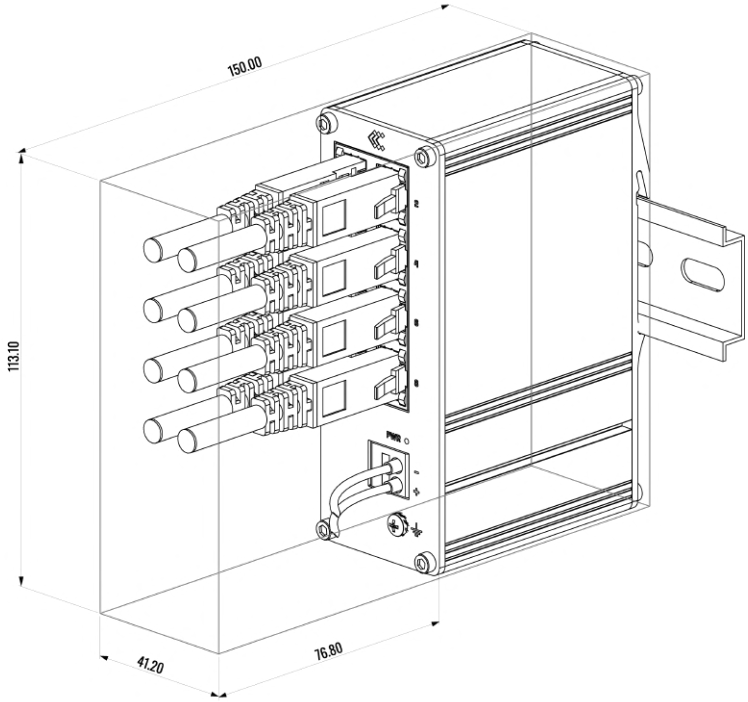

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.