

# PT-NRAS2C00-I2/S

## Intelligent Series

### Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on Intelligent algorithm
- Up to 4-ch perimeter protection
- Up to 1-ch facial recognition for video stream
- Up to 4-ch facial recognition for face picture
- Up to 8/16-ch IP camera inputs
- Up to 16-ch 1080p decoding capability



### Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%
- Full channel IP cameras connection
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading

### HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

### Storage and Playback

- Up to 2 SATA interfaces for HDD connection
- 8/16-ch synchronous playback at up to 1080p resolution

### Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Smart search for the selected area in the video, and smart playback to improve the playback efficiency
- POS information overlay on live view and playback
- POS triggered recording and alarm


## Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- Prama Online & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in

## Typical Application


### Facial Recognition and Face Picture Comparison

Modeling and analyzing face pictures captured by cameras. Realize block list alarm and stranger alarm via face picture library. Search target people by picture and name features.

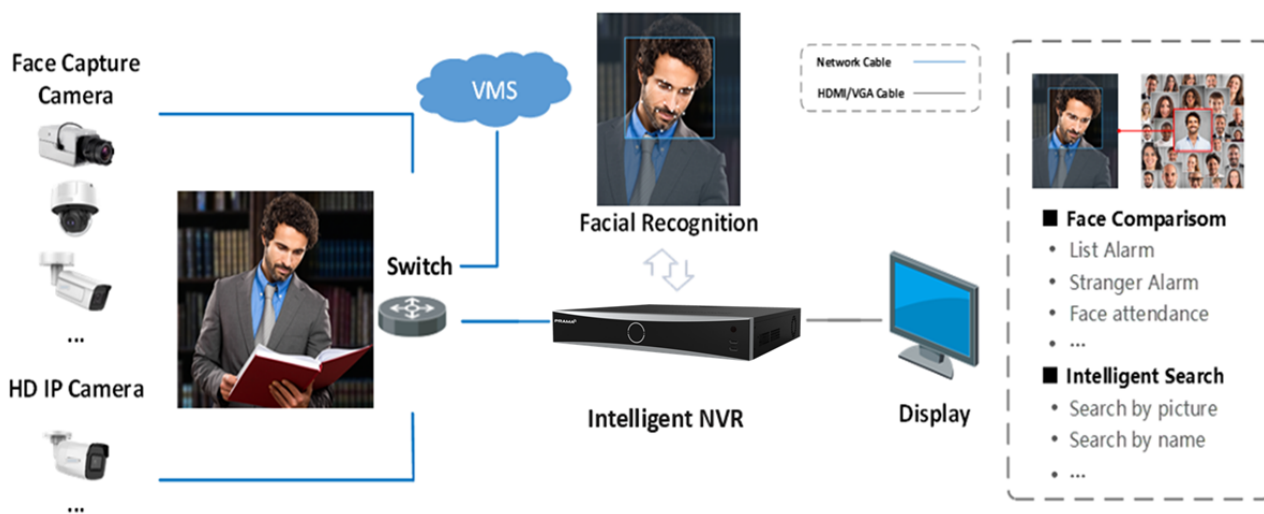

### Perimeter Protection

Adopt intelligent algorithm to reduce false alarm, effectively reduces the false alarm caused by tree branches, leaves, shadow, light, vehicles, small animals, etc.

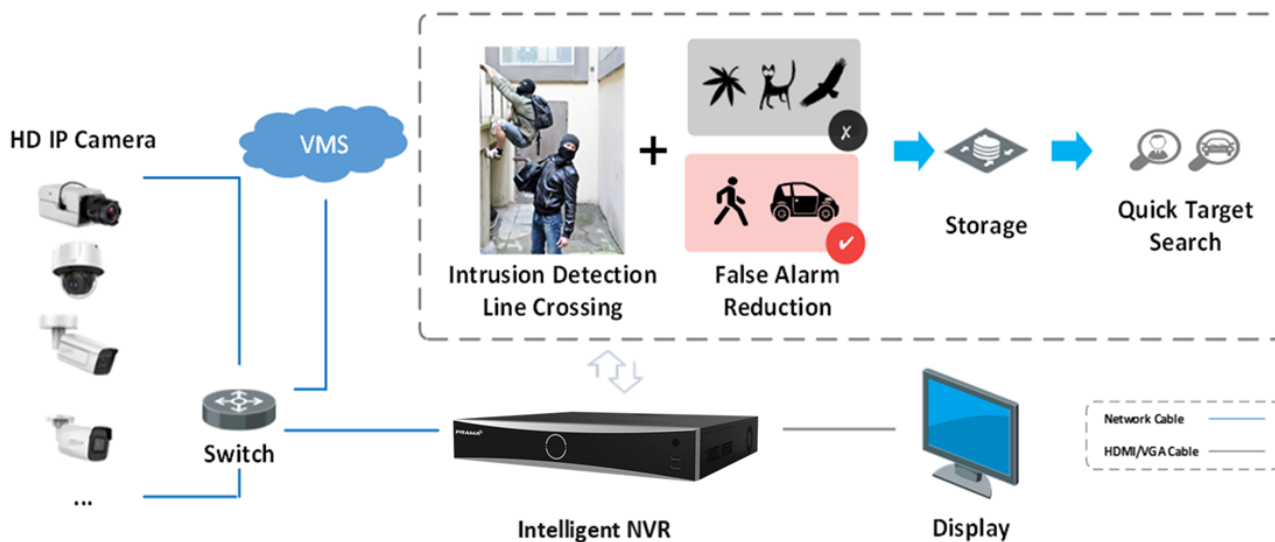

## Specification

Model	PT-NRAS2C08-I2/S	PT-NRAS2C16-I2/S
<b>Facial Recognition</b>		
Facial detection and analytics	Face picture comparison, human face capture, face picture search	
Face picture library	Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 150 MB)	
Face picture comparison	4-ch face picture comparison alarm	
Performance of facial detection and	1-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)	
<b>Perimeter Protection</b>		
Human/Vehicle analysis	Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm; Up to 12 rules in total	
<b>Video and Audio</b>		
IP video input	8-ch	16-ch
	Up to 12 MP resolution *: 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled.	
Incoming bandwidth	320 Mbps	
Outgoing bandwidth	256 Mbps	
HDMI output	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz,	
Video output mode	HDMI/VGA independent output	
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
Audio output	1-ch, RCA (Linear, 1 KΩ)	
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)	
<b>Decoding</b>		
Decoding format	H.265+/H.265/H.264+/H.264/MPEG4	
Recording resolution	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF *: 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled.	
Synchronous playback	8-ch	16-ch
Capability	16-ch@1080p (30 fps)	
Dual stream recording	Support	
Stream type	Video, Video & Audio	
Audio compression	G.711ulaw/G.711alaw/G.722/G.726/MP2L2	
<b>Network</b>		
Remote connections	128	
Network protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTP, HTTPS	

<b>Network interface</b>	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
<b>Auxiliary interface</b>	
<b>SATA</b>	2 SATA interfaces supporting hot-plug
<b>Capacity</b>	Up to 10 TB capacity for each disk
<b>Alarm in/out</b>	4/1
<b>USB interface</b>	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
<b>General</b>	
<b>Power supply</b>	100 to 240 VAC, 50 to 60 Hz
<b>Consumption (without HDD)</b>	≤ 15 W
<b>Working temperature</b>	-10 °C to 55 °C (14 °F to 131 °F)
<b>Working humidity</b>	10% to 90%
<b>Chassis</b>	1U chassis
<b>Dimension (W × D × H)</b>	385 × 315 × 52 mm ( 15.2 inch × 12.4 inch × 2.0 inch)
<b>Weight (without HDD)</b>	≤ 1.6 kg (3.5 lb)

\*Facial recognition and perimeter protection cannot be enabled at the same time. Enable one function will make the other one unavailable.


\*Specifications are subject to change without prior notice. \*Product picture may can be differ as per actual.

## Available Model


PT-NRAS2C08-I2/S

PT-NRAS2C16-I2/S

## Dimension

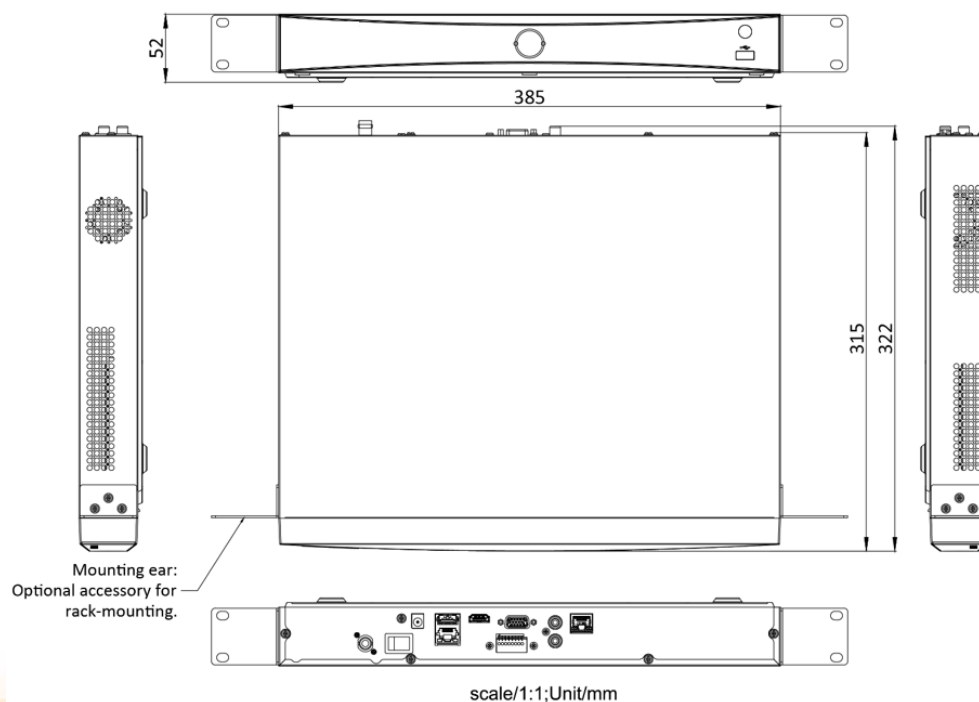

## Physical Interface

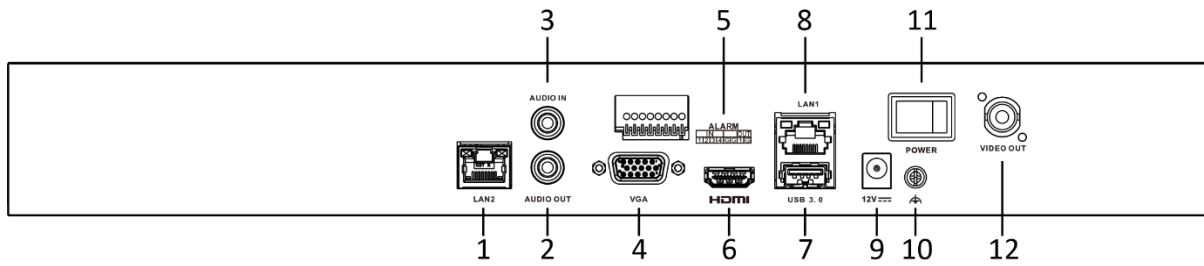

No.	Description	No.	Description
1	LAN2 Network Interface	7	USB 3.0 interface
2	AUDIO OUT	8	LAN1 Network Interface
3	AUDIO IN	9	Power Supply
4	VGA Interface	10	GND
5	Alarm In/Alarm Out	11	Power Switch
6	HDMI Interface	12	VIDEO OUT